

Outputs



Specification

Series	Robot SLAM
Model	RobotSLAM basic, RobotSLAM standard, RobotSLAM professional
Laser Scanner	16-channel ^①
Measurement Rate	Max. 320,000 points/sec ^①
Laser Safety Class	Class 1(IEC 60825-1:2014) eye-safe
Laser Wavelength	905 nm
Echo Mode	8-bit, dual return
Measuring Range	0.05-120 m
Scanning Rate	10 Hz
Scanning FOV	360°x 285°
Horizontal Angle Resolution	0.18° (10 Hz)
Vertical Angle Resolution	2°
Relative Accuracy	best up to 1 cm
GNSS Differential ^②	GPS+Glonass+Beidou+Galileo multi-constellation tracking
Signal Tracking ^③	555 channels
RTK Positioning Accuracy ^④	RMS 1 cm+1 ppm
CORS Access ^⑤	nano SIM card slot built in
Positioning Data Refresh Rate ^⑥	max. 100 Hz
Absolute Accuracy ^⑦	best up to 3-5 cm
Scanning Principle	laser sensor 360°mechanical rotation
Accumulated Mileage Error	0.1%-0.2% (under the condition without loop closure)
Housing Material	aviation-grade aluminum, with high protection level and anti-inference capability
Weight	1.9 kg (handheld only)
Dimension	262x230x146 mm
System Consumption	20 w
Power Supply	dual external Li-ion battery, hot swappable
Battery Unit	DC 14.4V, 6875mAh, 99Wh
Endurance	single battery ≥2 hours, dual batteries ≥4 hours
IP Protection	IP 54
Temperature	-20~65°C (operating), -40~85°C (storage)
Device Connection	Wi-Fi or Ethernet cable
Data Storage	built-in SSD, 512GB (extendable upon request); SD card (removable), 128GB
Data Download	via Ethernet cable, WiFi or SD card
Panoramic Camera	2-lens, fisheye, 360°, image pixels 18 MP, video pixels 5.7k
Software Package	RobotSLAM Palm (smartphone APP), RobotSLAM Engine (PC)
Processing Method	post-processing on PC
Process Time	approx. 1-2 times of data acquisition

Note:

- ① to expect higher point rate like 640,000 points/sec max., 32-channel laser sensor is also available upon request, and that's RobotSLAM Plus series.
- ② GNSS differential performance is only applicable to the standard and professional versions. In outdoor scenes with moderate satellite signals coverage, it is recommended to activate GNSS RTK for positioning, which may help much to eliminate control points record and measurement.


Options

Model	RobotSLAM basic	RobotSLAM standard	RobotSLAM professional
Handheld Components	√	√	√
Control Point Record Button	√	√	√
Built-in GNSS Module	-	√	√
GNSS Antenna	-	√	√
LED Screen	√	√	√
Smartphone Holder	√	√	√
Smartphone APP	√	√	√
Pano Camera	option	option	option
Fill-in Light ^①	option	option	option
Backpack Kit	-	-	√ ^②
AI Robot Dog Mount Kit ^③	-	option	option
USV-based Mount Kit ^④	-	option	option
SUV-based Mount Kit ^④	-	option	option
UAV-based Mount Kit ^④	-	option	option

Notes:

- ① fill-in light and 360°pano camera are bundled as a visual module.
- ② the backpack kit includes a white plate antenna and a longer GNSS antenna cable; the backpack 3-in-1 magic tactically provides two working modes in one package: handheld and backpack, plus the storage function. No carrying case or trolley suitcase needed.
- ③ AI Robot Dog Mount kit, USV-based Mount kit, SUV-based Mount kit and UAV-based Mount kit are all optional accessories, available upon request.

SANDING OPTIC ELECTRICS INSTRUMENT CO., LTD.


 Add: Geo-information Industrial Park, No 39 Si Cheng Rd, Guangzhou, China Tel: +86-20-23380888 Fax: +86-20-23380800
 E-mail: export@sandinginstrument.com
 http://www.sandinginstrument.com

dealer info

ROBOT SLAM

SANDING

A Survey-grade SLAM Handheld




direct geo-referencing
 amazing cm-level accuracy
 backpack 3-in-1 magic
 abundant software functions




(V. 202305)


Illustration

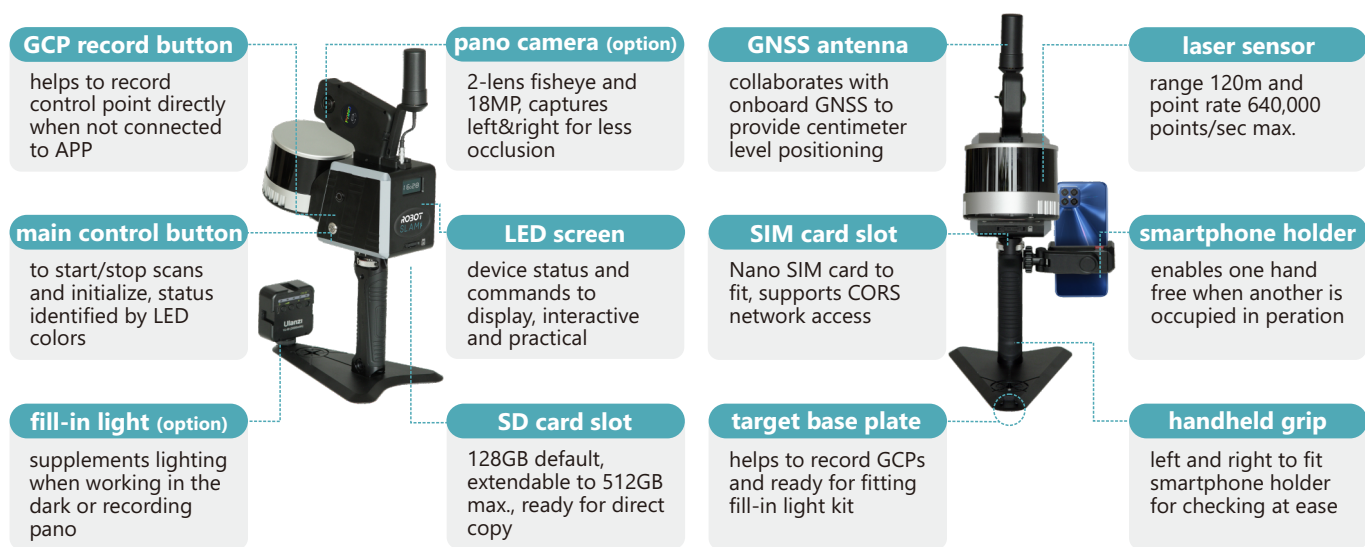


Platforms

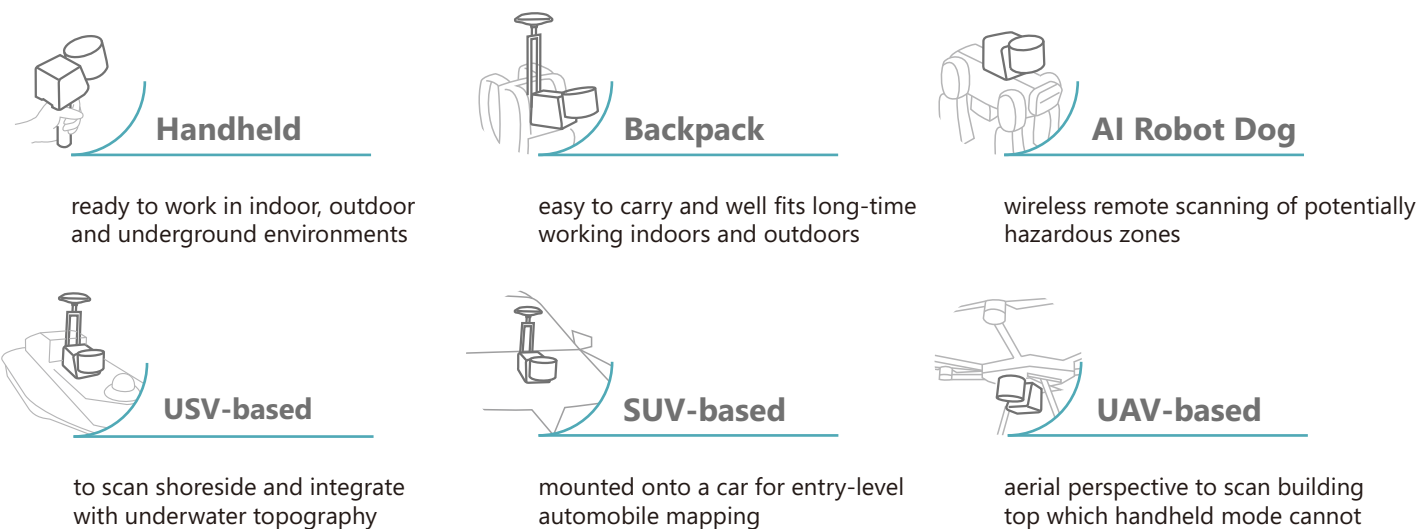

Backpack 3-in-1

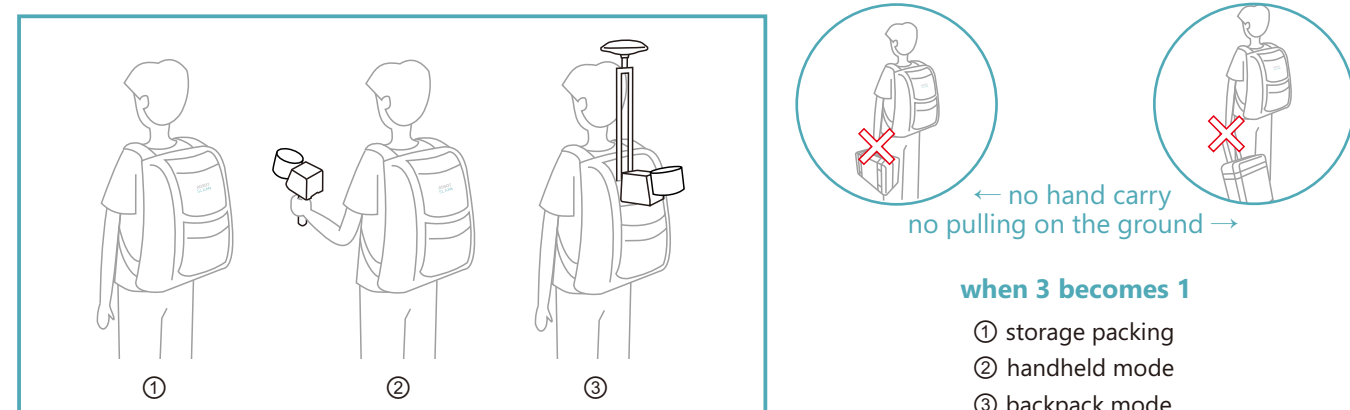

APP&Software

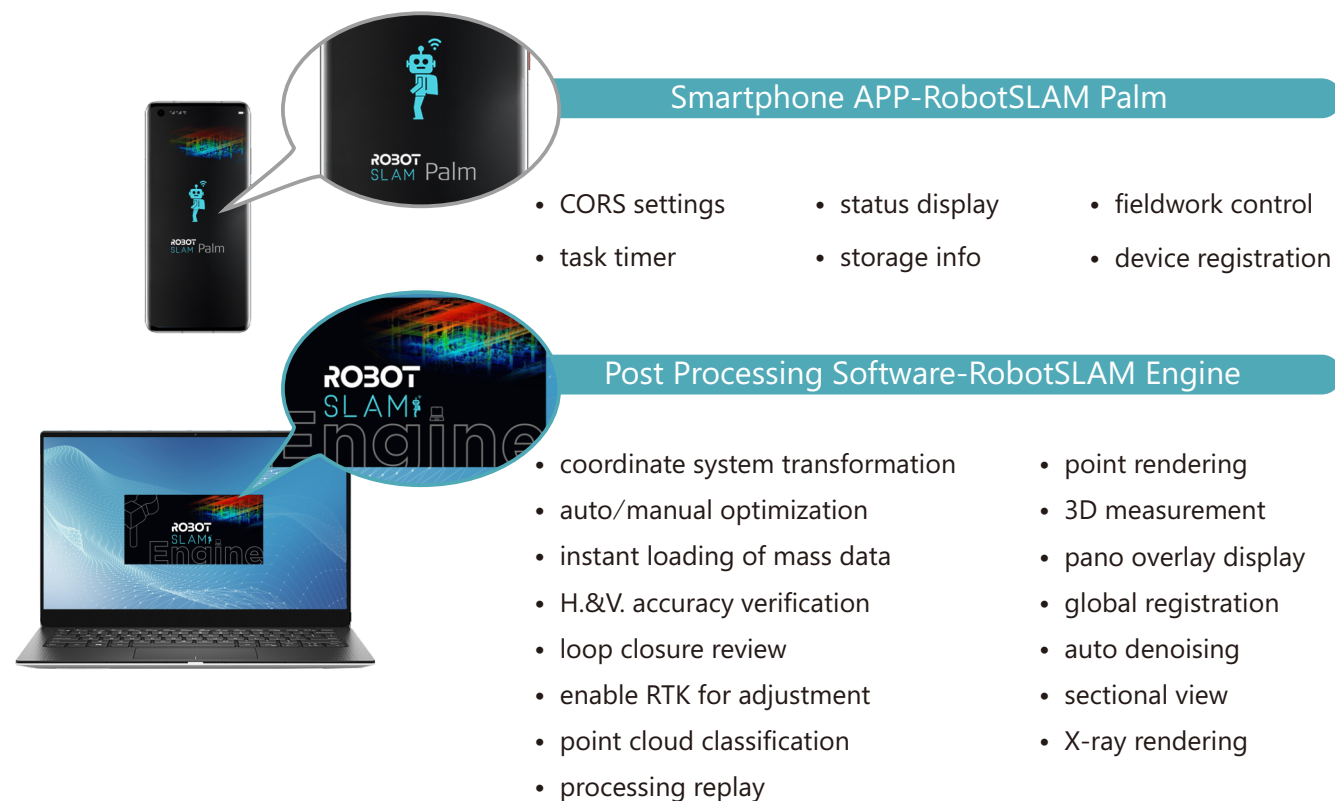

Computer Configuration

Requirement	Minimum	Recommended
Graphics Card	Windows10/Windows11 64-bit	
CPU	GTX-3060/RX6600M or above (NVIDIA series recommended)	
Internal Memory	Intel i7-11800H/AMD R7-5800H or above	Intel i7-12700H/AMD R7-6800H or above
RAM	16GB or above	32GB or above
SSD	1TB or above	2TB or above

Note: for faster data loading, it's recommended to process the data directly with SSD instead of HDD.

Unboxing



Applications

